MDSdisplays.com

2,5 Indoor LED Poster

Contact: sales@nagasoftsales.com

Sales Offices in Europe, North America & Latin America.

Peter Hossfeld (peter.hossfeld@nagasoftsales.com)
Clive Vickery (clive.vickery@nagasoftsales.com)
Peter Connaway (peter.connaway@nagasoftsales.com)

www.MDSdisplays.com

Technical Specifications

Item	Parameter
Pixel Pitch	2.5mm
Module Size (W*H)	320×160mm
Display Resolution (pixels)	256×768
Led Encapsulation	SMD 3 in 1
Pixel Density	196,608 Pixel/screen
Display Size (H*L)	640 ×1920 mm
Cabinet Materail	Aluminium Alloy
Frame Color	Black (Default)
Weight	40Kg
Brightness	≥1000cd/m2
Drive Mode	1/32 continue scan
Optimum Viewing Angle	160º(V) 160º(H)
Display Color	4400 Billion
Gray Scale	12 bit
Refresh Frequency	1920HZ

Adjustment

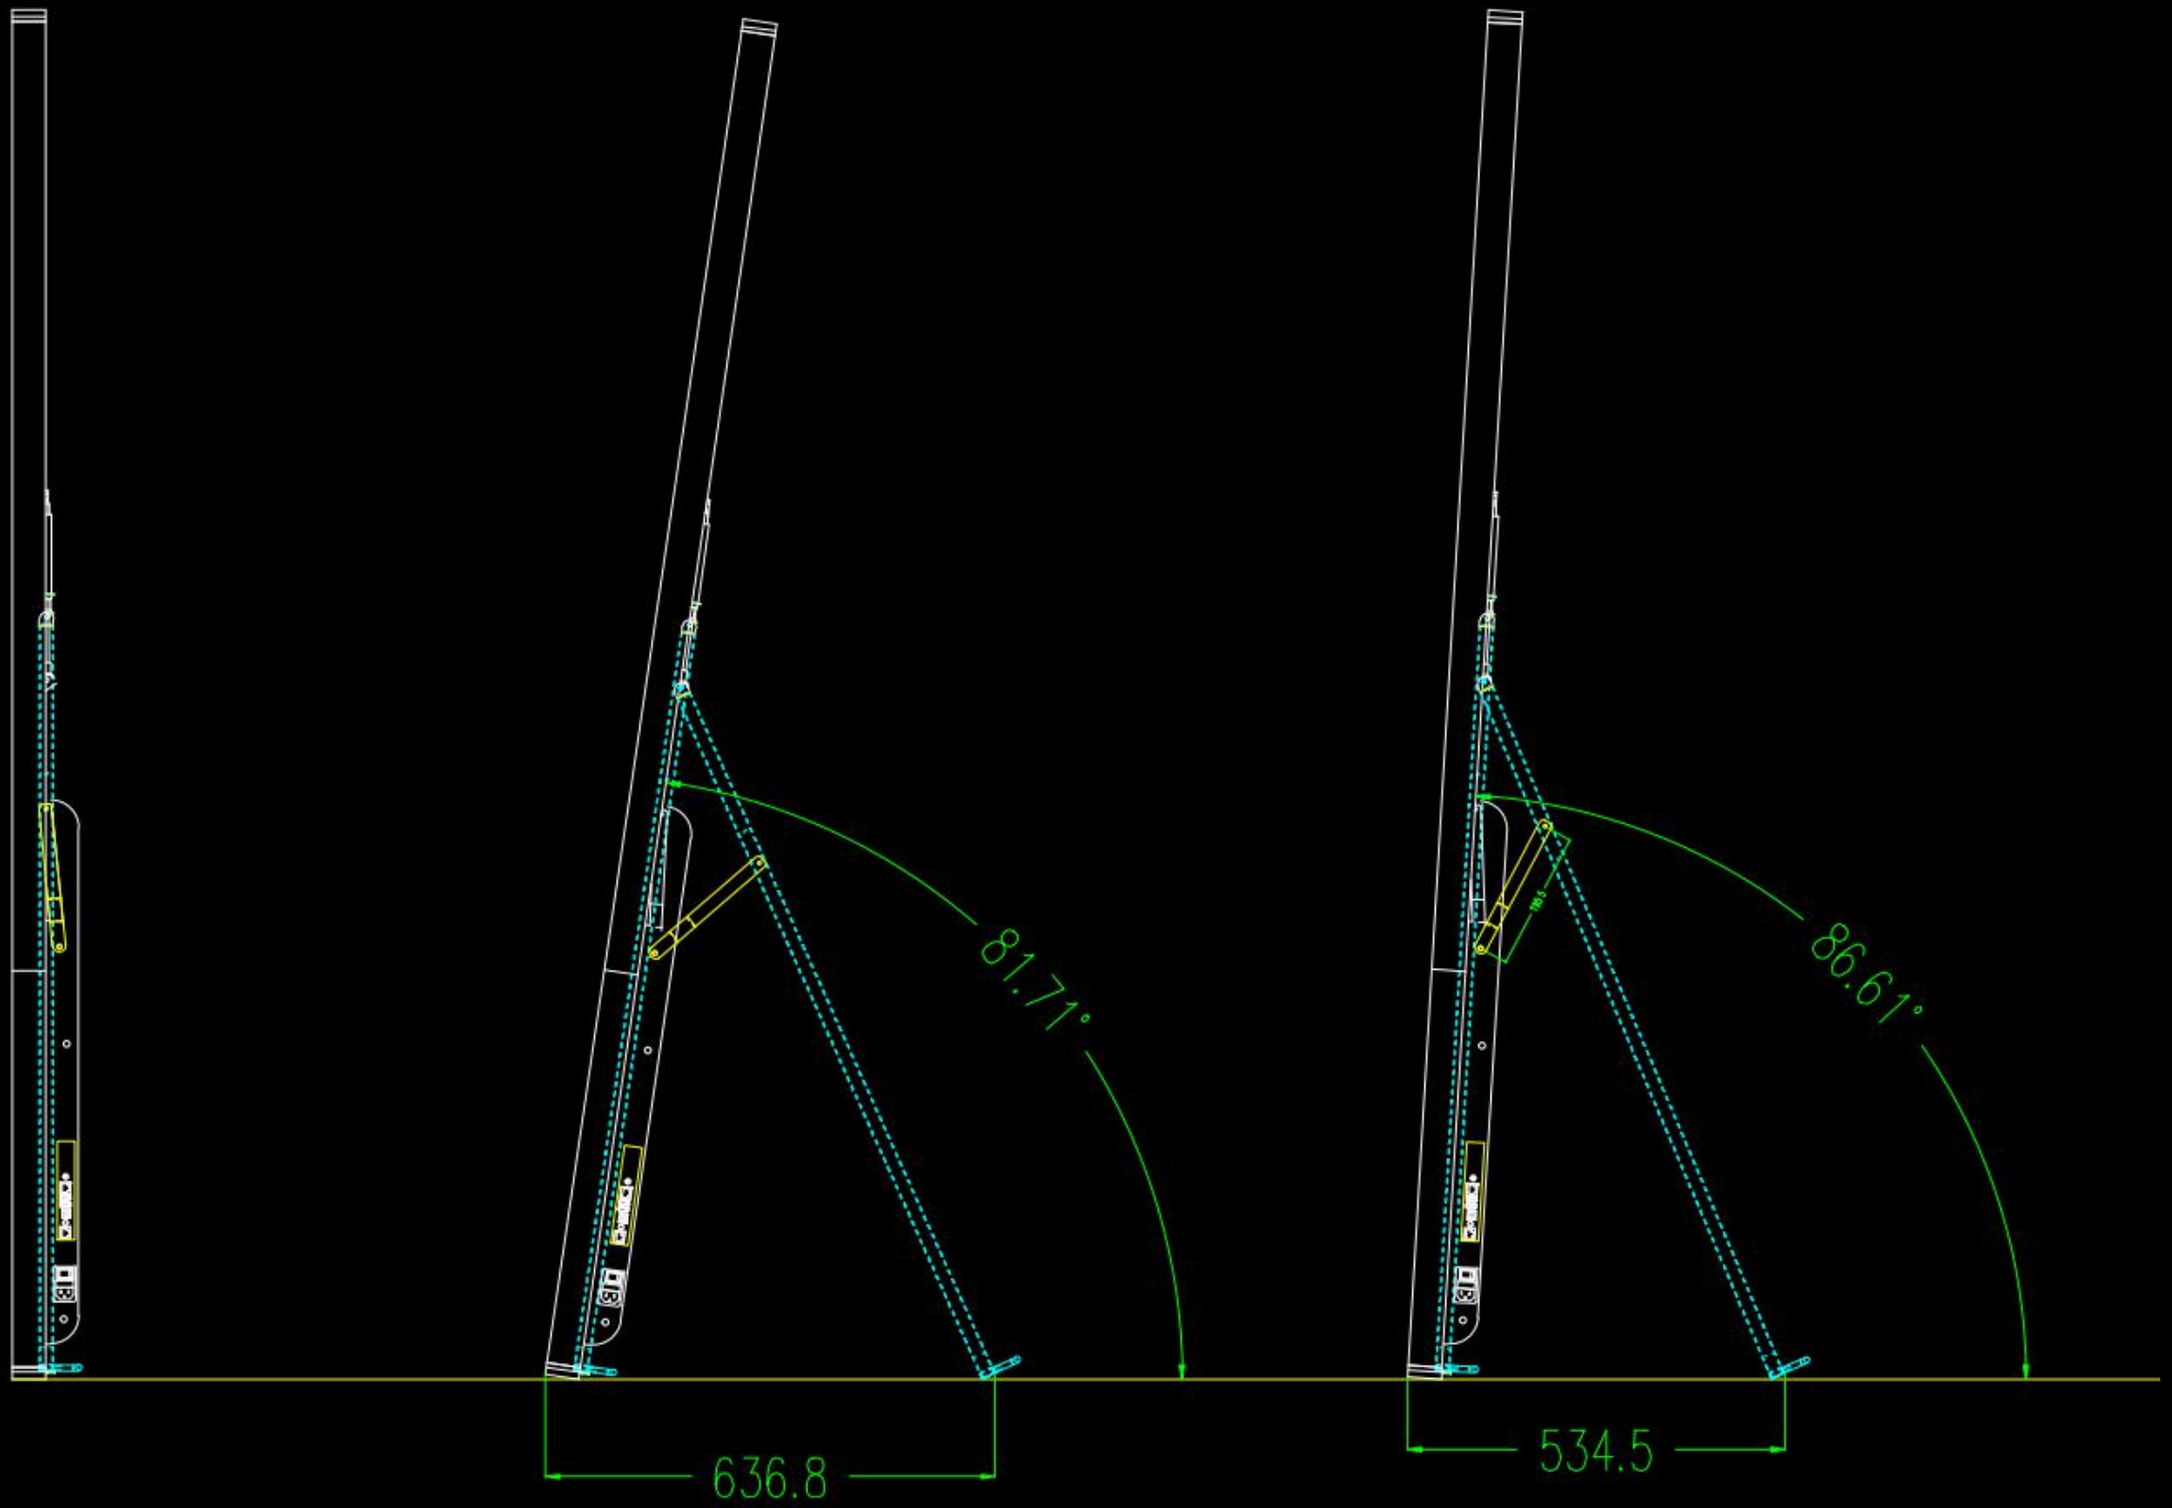

Details

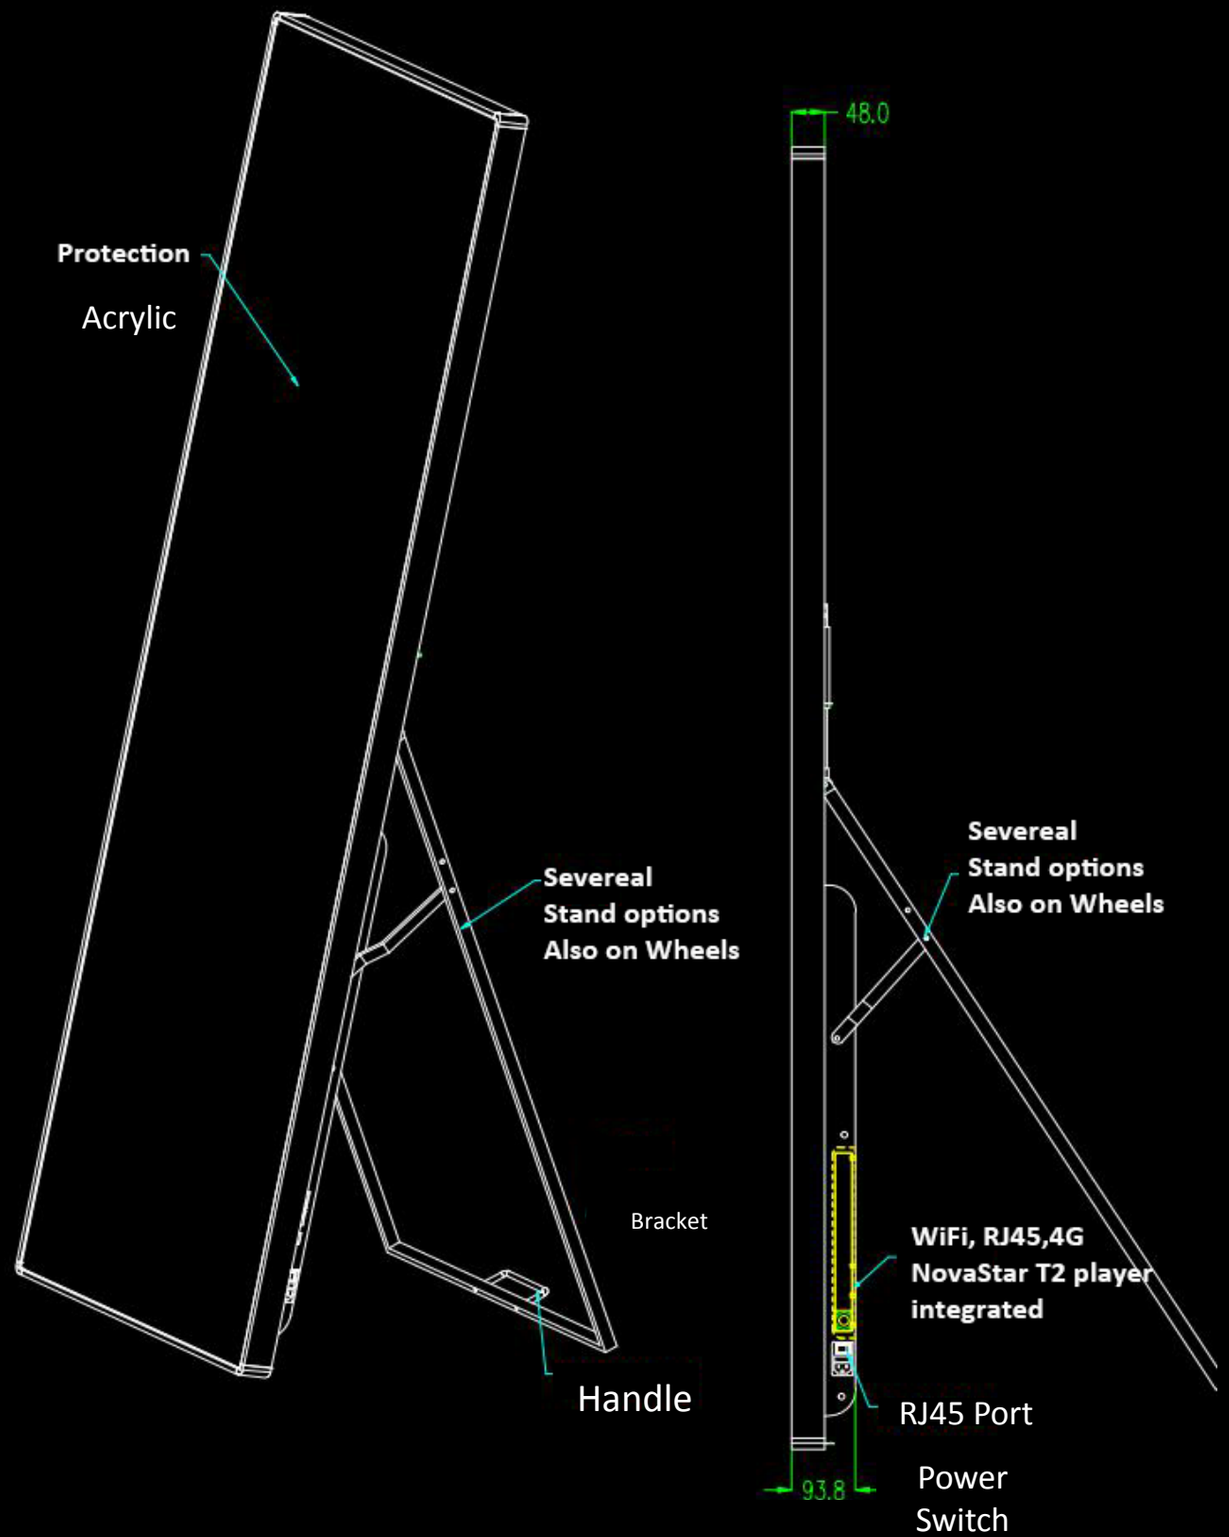
Protection
Acrylic
Severeal
Stand options
Also on Wheels
Bracket
Handle
48.0
Severeal
Stand options
Also on Wheels
WiFi, RJ45,4G
NovaStar T2 player
integrated
RJ45 Port
93.8
Power
Switch

Rollable konfiguration and Transportcase

Transportcase

Smart Control

Control Playback with NovaStar ViPlex Express LAN-Based Screen Management Software:

- Friendly user interface: UI design takes full account of users' habits.
- Ease of use: Capable of connecting to terminals via wireless network, providing an easy access to terminals.
- Synchronous playing: Capable of playing the same content on different screens synchronously.
- Dual Wi-Fi function: Capable of setting Wi-Fi AP mode and Wi-Fi Sta mode.
- 4G connection: Capable of setting mobile data network of the terminal with 4G module.
- Dual-mode (synchronous and asynchronous), which is capable of setting video output mode.
- Adaptive display, which is capable of displaying pictures automatically according to screen size.
- Terminal binding: Allows multiple terminals to be bound to VNNOX for unified management.

Multiple Installations

Suitable for hanging, wall-mounted, base-standing, bracket standing and creative installation.

Bracket Standing

Base Standing

Hanging

Multi screen cascade

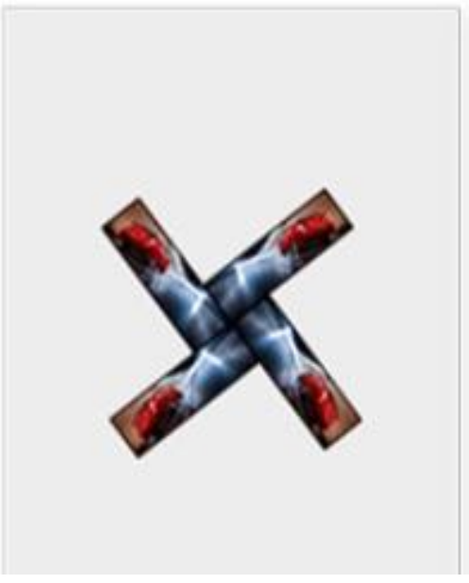

Creative Installation

Applications

- **Replaced traditional paper roll**
- **Convention Centers**
- **Shopping Malls**
- **Meeting Rooms**
- **Command & Control Centers**
- **Airports**
- **Supermarkets**
- **Resturants**
- **Clubs**

Some References

Technical Advantages

Color Quality

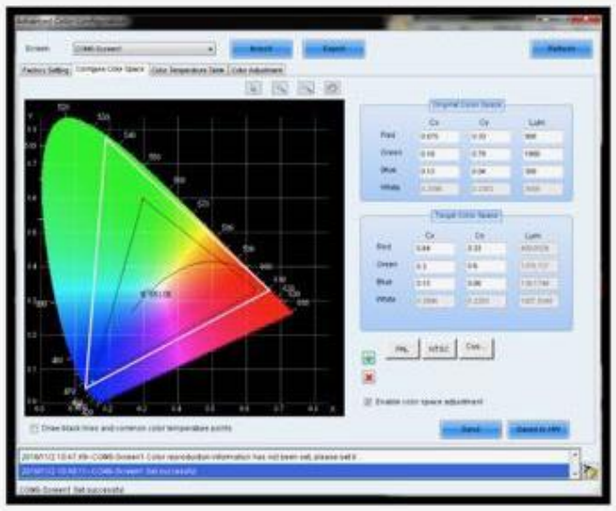

- ✓ Ensures up to 99% uniformity of brightnes.
- ✓ Up to 687 million colors.
- ✓ Low light operation without loss of color.
- ✓ Brightness level from 1 to 100%.
- ✓ Gamma curve (color range).

Grey Level

Our hardware is capable of reproducing colors and grey levels very precisely, even when the display is using a very low brightness, for example during the night. The gurantees the best image quality all the time.

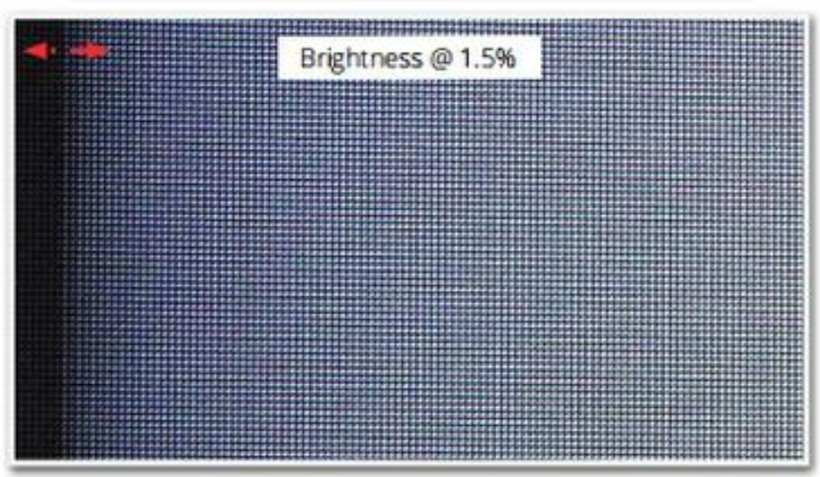

Our Factory

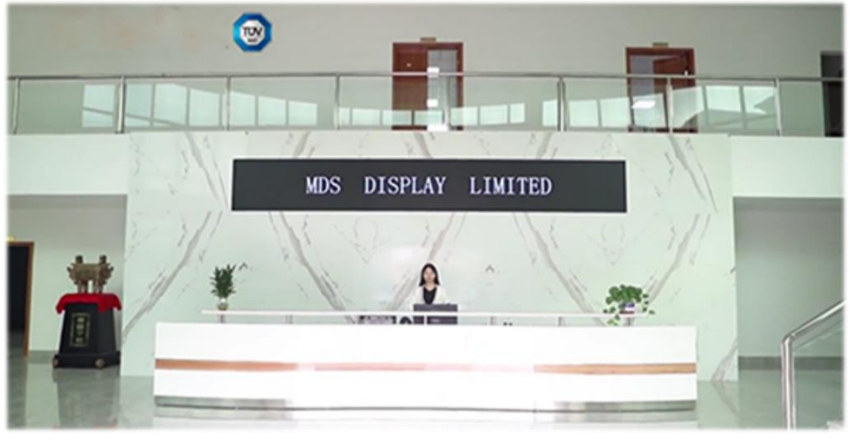

Air Shower

Panasonic NPM-D3
Japan

Product quality is our core, Full Dust-free & Anti-static Workshop.

PARMI SPI SIGMAX
Solder Paste Inspection
Korea

HELLER Reflower
USA

Contact: sales@nagasoftsales.com

Sales Offices in Europe, North America & Latin America.

Peter Hossfeld (peter.hossfeld@nagasoftsales.com)
Clive Vickery (clive.vickery@nagasoftsales.com)
Peter Connaway (peter.connaway@nagasoftsales.com)

www.MDSdisplays.com